

Guidelines for Using Commonly Used Tools


Standard Operating Procedures-JLink-(EV Charger)

ATESS ENERCOLLEGE

Technical Support Document

1 Introduction

J-Link is a tool for updating chips, mainly used to update the motherboard of EV chargers. The appearance of J-Link from different vendors may look different but are normally interchangeable.

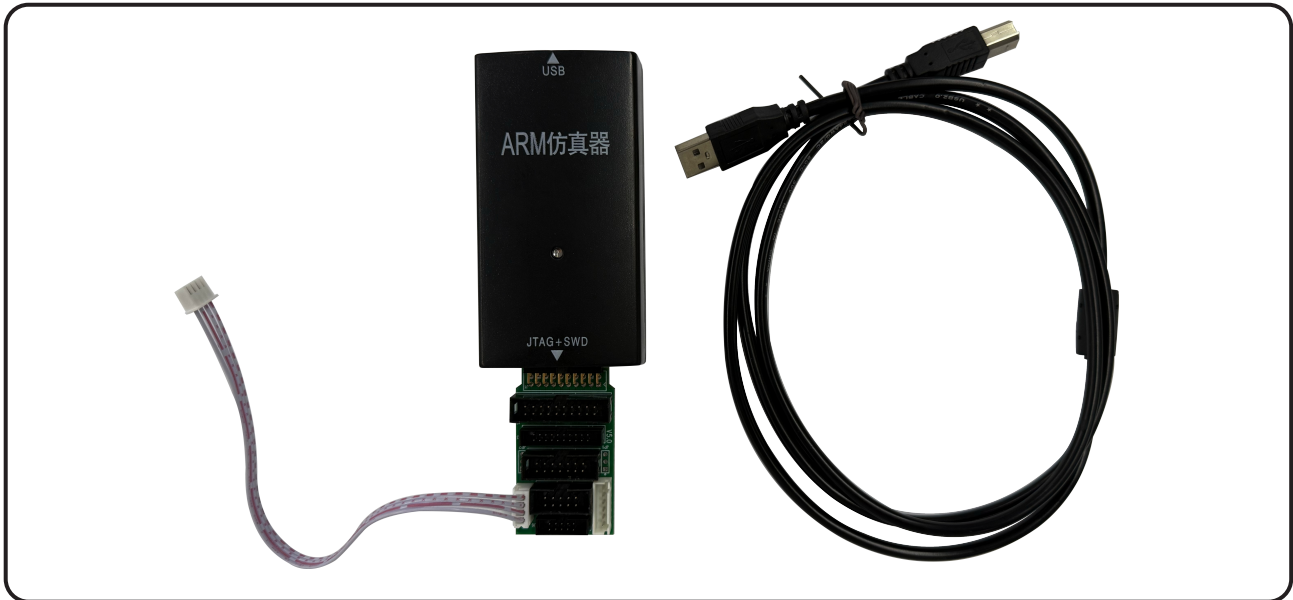

The following image shows examples of motherboard updates. The image below shows using JLink to connect motherboard and computer.




2 How to use

1. Download the latest version of JLink from Google Drive, then download and install on your computer.

Download link:

https://drive.google.com/drive/folders/1FCNp-GSM-7Xuj0kPJIsfw3uqcAQDvubc?usp=drive_link

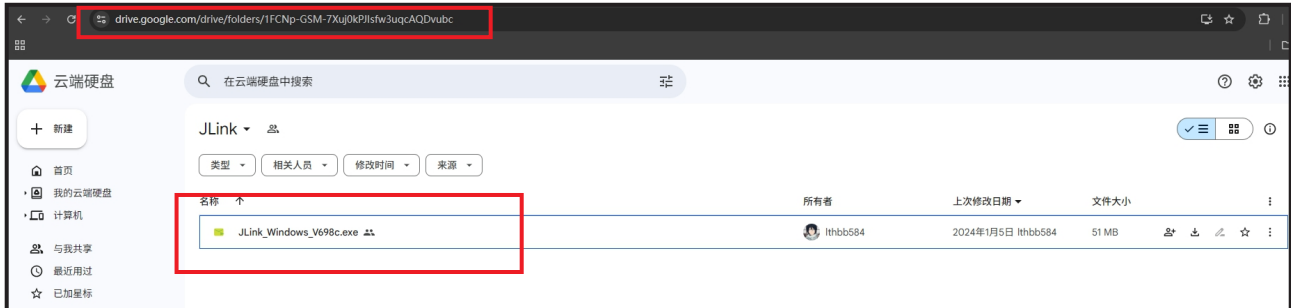

2. After installation is completed, run "J-Flash Lite", enter the homepage, choosing correct chip, then click "OK".



3. Then choosing correct firmware, and click program device, after you hear motherboard beep sound, it means that upgrade finished.

