


PCS100/250/500/630/1000


Bidirectional battery inverter from 100kW to 1000kW, can be used alone or with solar charge controllers and other accessories for different application scenarios.

Features

-  Programmable working mode
-  Flexible configuration
-  Touchscreen LCD
-  Support remote control of DG
-  Max. 8 units in parallel for on&off grid operation



Block Diagram

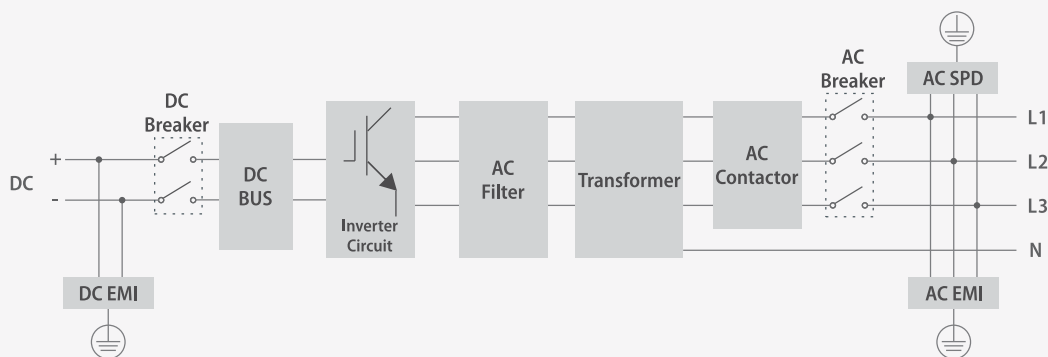

	PCS100	PCS250	PCS500	PCS630	PCS1000
AC(on-grid)					
Apparent power	110kVA	275kVA	550kVA	693kVA	1000kVA
Rated power	100kW	250kW	500kW	630kW	1000kW
Rated voltage	400V	400V	400V	400V	400V
Rated current	144A	361A	722A	909A	1443A
Voltage range	360V-440V	360V-440V	360V-440V	360V-440V	360V-440V
Rated frequency	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Frequency range	45~55/55~65Hz				
THDI	<3%				
PF	0.8 lagging~0.8 leading				
AC connection	3/N/PE	3/N/PE	3/PE	3/PE	3/PE
Max. rectified power	100kW	250kW	500kW	630kW	750kW

AC(off-grid)					
Apparent power	110kVA	275kVA	550kVA	693kVA	1000kVA
Rated power	100kW	250kW	500kW	630kW	1000kW
Rated voltage	400V	400V	400V	400V	400V
Rated current	144A	361A	722A	909A	1443A
THDU	≤2% linear				
Rated frequency	50/60Hz				
Overload capability	110%-10 mins 120%-1 min				

DC (Battery)					
Rated power	100kW	250kW	500kW	630kW	1000kW
Current regulation	±1%	±1%	±1%	±1%	±1%
Voltage regulation	±1%	±1%	±1%	±1%	±1%
Voltage ripple	<3%	<3%	<3%	<3%	<3%
Current ripple	<2%	<2%	<2%	<2%	<2%
Voltage range	500V-820V	500V-820V	600V-900V	600V-900V	650V-900V
Max. charge/discharge current	220A	550A	917A	1155A	1154A/1600A

General Information					
Max. efficiency	97.10%	97.30%	98.50%	98.50%	99.0%
Dimension(W/H/D)mm	1100/1890/850	1600/2080/850	1200/1900/800	1200/1900/800	1510/1900/850
Weight	820kg	1465kg	870kg	900kg	1500kg
Build-in transformer	Yes	Yes	No	No	No
Lightning protection	Type II	Type II	Type II	Type II	Type II
Protection degree	IP20				
Noise emission	<75dB(A)@1m				
Operating temperature	-25°C~+55°C				
Cooling method	Forced-air				
Relative humidity	0-95% non-condensing				
Max. altitude	6000m(derate above 3000m)				
Transfer between on/off grid	Manual(default), Automatic(optional)≤10ms				
Grid support	L/HVRT, FRT, active & reactive power control and power ramp rate control. Volt-var, Volt-watt. Frequency-watt				

Communication	
Display	Touch screen
Communication	RS485/CAN

Certificate	
PCS100/250/500/630	CE, MEA, PEA, EN 61000-6-2:2019, EN 61000-6-4:2019, EN62109-1:2010, EN62109-2:2011, NRS 097-2-1:2017, VDE 0126, UTE C-15-712, EN 50549-1:2019, AS/NZS 4777.2:2020, AS IEC 62477-1:2016, NC RfG, G99, DEWA Annex D.3:2016, CEI 0-16:2022, EN 62920:2017+A1:2021
PCS1000	EN 61000-6-4:2019, EN 55011:2016+A2:2021, EN 61000-6-2:2019, IEC 61000, EN 62920:2017/A1:2021, CISPR 11:2015/A1:2016